

VOCSTOP

Primary | Secondary | Wax Scaper | Water Shedder

Spring-loaded full-contact gastight primary seal



Environmental
Protection Technology for
Storage Tanks GmbH

INSTALLATION

The VOCSTOP primary rim seal will ensure full-contact operation despite any tank shell irregularities and is tailored to fit each individual tank in order to achieve gastight performance and unparalleled reduction of vapour losses and fire/explosion risks.


MANUFACTURING



DESIGN

- Excellent return on investment with a lifetime expectancy **equal to the tank** without maintenance
- Full working range of R(-X/+3X)
- The gastightness of the primary seal can be proven after installation and while the tank is in-service
- Different X-values to accommodate any out-of-roundness
- Adaptable to all existing rim configurations without any hot-work
- The combination of the ONE primary and ONE secondary seal meets even the most stringent emissions regulations
- Materials specifically selected for their required resistances
- Flame retardant materials in accordance with DIN 22100 / 22118
- Fully electrically conductive
- Fast and easy installation.

R&D

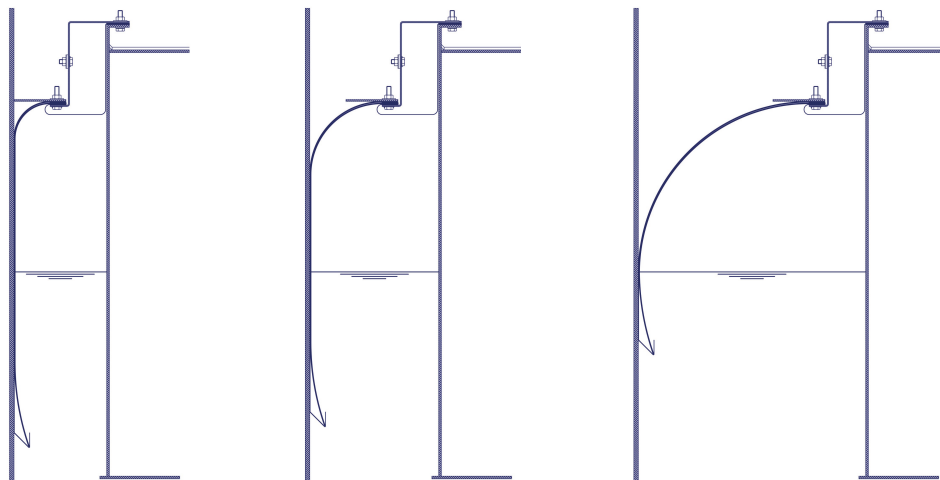

WWW.EPT-STORAGETANKS.COM

ADDRESS

Passower Chaussee 111, Gebäude H 122
DE-16303 Schwedt/Oder
Germany

CONTACT

Tel: +49 333 283 43034
E-Mail: info@ept-storage tanks.com

Version: 2018-08-EN